

## CTA 2450/5/DR/SM/W1

### Technical Data

#### Unique Features

Flexible element, clutch allows 360° rotation, right angle knuckle adjustable 0–90°


#### Electrical Properties

Frequency Range	:	2.4 ~ 2.5 GHz
Impedance	:	50 Ohms
VSWR	:	1.9 max at resonance
Gain	:	5 dBi
Radiation	:	omni, 1/2 wave dipole
Polarization	:	linear, vertical

#### Mechanical Properties

Standard Connector	:	SMA male
Length (bent, 90°)	:	161 mm
Length (straight, 180°)	:	182 mm
Radiator Material	:	copper
Color	:	black
Temperature Range	:	-30 °C~+70 °C

#### Radiation Pattern

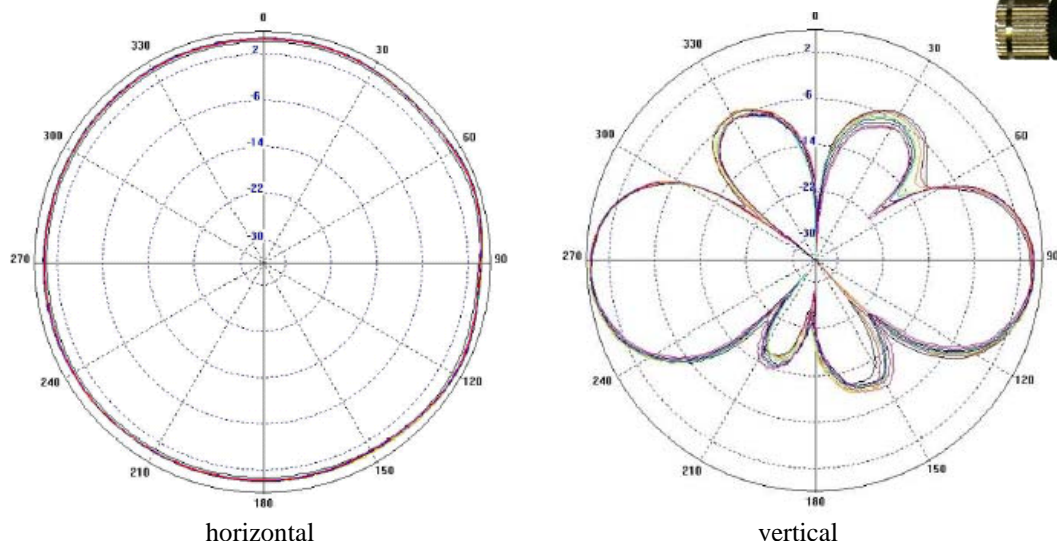

Specifications subject to change without any notice !

CompoTEK GmbH, Lindwurmstrasse 97A, 80337 München, Germany  
Fon:+49 (0)89/5443230, Fax:+49 (0)89/535623  
[info@compotek.de](mailto:info@compotek.de), [www.compotek.de](http://www.compotek.de)