


# Quectel BC660K-GL

## Compact NB-IoT Module with Ultra-low Power Consumption

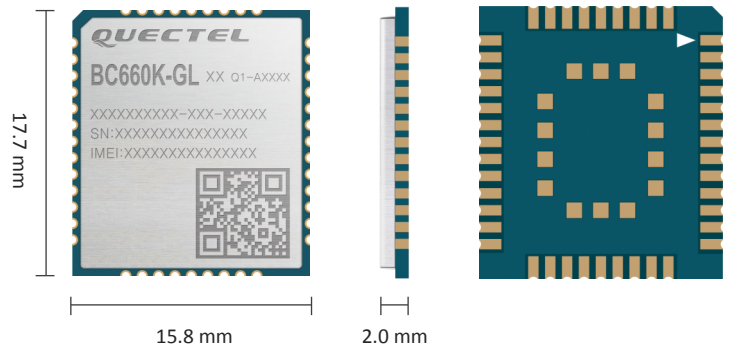

BC660K-GL is a high-performance LTE Cat NB2 module which supports multiple frequency bands of B1/B2/B3/B4/B5/B8/B12/B13/B14/B17/B18/B19/B20/B25/B28/B66/B70/B85 with extremely low power consumption. The module's ultra-compact profile (17.7 mm × 15.8 mm × 2.0 mm) makes it a perfect choice for size-sensitive applications. Designed to be compatible with Quectel GSM/GPRS M66 module and NB-IoT BC66 module in form and size, it provides a flexible and scalable platform for migrating from GSM/GPRS to NB-IoT networks.

BC660K-GL adopts surface-mount technology, which makes it an ideal solution for durable and rugged designs. The module's small LCC package allows it to be easily embedded into space-constrained applications and to enjoy reliable connection with the applications. This kind of package suits well large-scale manufacturing which has strict requirements on cost and efficiency.

Due to the ultra-compact profile, super-low power consumption and extended temperature range, BC660K-GL is the best choice for a wide range of IoT applications, such as smart metering, bike sharing, smart parking, smart city, security and asset tracking, home appliances, agricultural and environmental monitoring, etc. It is able to provide a complete range of SMS and data transmission services to meet various user demands.



### Key Features

- ✓ Compact-sized, multi-band LTE Cat NB2 module
- ✓ Ultra-low power consumption
- ✓ Ultra-low cost
- ✓ Built-in eSIM reserved
- ✓ Wide power supply range: 2.2–4.3V
- ✓ LCC package facilitating large-volume manufacturing
- ✓ Compatible with Quectel GSM/GPRS M66 and NB-IoT BC66 modules, which means easier future upgrading
- ✓ Embedded with abundant Internet service protocols
- ✓ Multi-band and rich external interfaces ensuring convenient application



Compact Size



Multi-Band NB-IoT



Extended Temperature Range: -40 °C to +85 °C



LCC Package



Multiple Serial Ports



Ultra-low Power Consumption



Quectel Enhanced AT Commands



Embedded Internet Service Protocols

# Quectel BC660K-GL

## Compact NB-IoT Module with Ultra-low Power Consumption

### Frequency Bands

Cat NB2:

B1/B2/B3/B4/B5/B8/B12/B13/B14/B17/

B18/B19/B20/B25/B28/B66/B70/B85

### Data

Cat NB2 Data Transmission:

Single-tone:

DL: 25.5 kbps

UL: 16.7 kbps

Multi-tone:

DL: 127 kbps

UL: 158.5 kbps

Protocol Stacks:

UDP/TCP/LwM2M\*/SNTP/MQTT\*/MQTTS\*/

SSL\*/TLS\*

Download Methods:

Main UART

DFOTA

### SMS\*

Text/PDU Mode

### Electrical Characteristics

Maximum Output Power:

23 dBm  $\pm$ 2 dB

Sensitivity:

-114 dBm

Power Consumption (Typical) :

800 nA @ PSM

0.11 mA @ Idle (DRX = 2.56 s)

0.038 mA @ Idle (eDRX = 40.96 s, PTW = 10.24 s)

67 mA @ Connected Tx 0 dBm

330 mA @ Connected Tx 23 dBm

### Interfaces

USIM  $\times$  1

UART  $\times$  2 (for QuecOpen<sup>®</sup> version,  $\times$  3)

RI\*  $\times$  1

ADC\*  $\times$  1 (for QuecOpen<sup>®</sup> version,  $\times$  2)

RESET  $\times$  1

BOOT  $\times$  1

NETLIGHT\*  $\times$  1

Antenna  $\times$  1

GPIO  $\times$  4 (for QuecOpen<sup>®</sup> version,  $\times$  13)

PSM\_ENIT  $\times$  1 (for QuecOpen<sup>®</sup> version,  $\times$  2)

SPI\*  $\times$  1 (for QuecOpen<sup>®</sup> version only)

I2C\*  $\times$  1 (for QuecOpen<sup>®</sup> version only)

PWM\*  $\times$  1 (for QuecOpen<sup>®</sup> version only)

### General Features

LCC Package

58 Pins

Supply Voltage Range:

2.2–4.3 V, typical. 3.3 V

Temperature Range:

Operation: -35 °C to +75 °C

Extended: -40 °C to +85 °C

Dimensions:

17.7 mm  $\times$  15.8 mm  $\times$  2.0 mm

Weight:

1.0  $\pm$ 0.2 g

AT Command:

3GPP TS 27.007 V14.3.0 (2017-03) and Quectel

Enhanced AT Commands

### Approvals

Carrier\*:

Verizon/AT&T (America)

Regulatory\*:

GCF (Global)

CE (Europe)

PTCRB (North America)

FCC (America)

Note:

\*: Under Development